


Brett Martin Ltd. 24 Roughfort Road, Mallusk, Co. Antrim, N.Ireland, BT36 4RB  
 Technical Service Department: Phone +44 (0) 28 9084 9999 Fax: +44 (0) 28 9083 4234

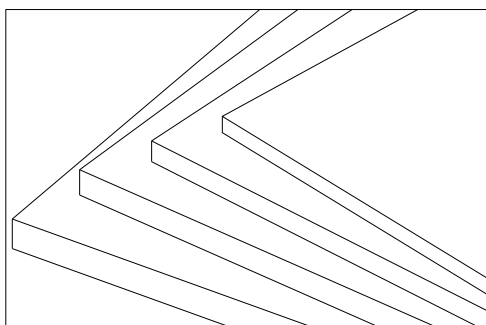

# Foamalex Xtra S1

## Rigid Foam PVC

**FOAMALUX Xtra S1** is an extruded, closed cell, unplasticised PVC foam sheet. Foamalex Xtra has been developed to utilize re-cycled PVC within a high quality sheet product, ideal for use in a wide variety of applications. Foamalex Xtra S1 consists of a base of re-cycled material with co-extruded smooth surface of premium Foamalex material. The re-cycled base is in excess of 80% of the total finished sheet. It is currently available as 3mm and 5mm thick sheet. The extruded sheet has a smooth semi matt surface finish.

### Service Temperature

FOAMALUX Xtra S1 can be installed in a diversity of applications, with varying temperatures. The material's mechanical performance is known to remain stable in prolonged service in temperatures ranging from -20 to +60 °C.

### Installation

Applications of FOAMALUX Xtra S1 must make adequate allowance for thermal movement. Adequate clearance must be allowed if holes are drilled for fixing and in rebates of support frames.

<b>Colours:</b>	White
-----------------	-------

\*Non-standard colours are available subject to minimum order quantities.

<b>Standard sheet sizes:</b>		<b>Thickness</b>
White	2440 x 1220 mm	3 & 5 mm
	3050 x 1220 mm	3 & 5 mm

\*Non-standard sizes are available subject to minimum order quantities.

<b>Standard sheet sizes:</b>		<b>Tolerance:</b>
Width:		-0, +3 mm
Length:		-0, +10 mm
Thickness:		+0, -10% mm

**Sheet Weight:** 1.8 kg/m<sup>2</sup> (3 mm)