

## PANORAMA TWO WAY VISION

Two Way Vision is a glossy, calendered PVC film. It is specifically designed for applications where the advertisement should be visible from both sides. With this effect the advertisement gets a whole new value and is very versatile. Even though you only print on one side, the picture is visible on both sides. This film is perfect for advertisement that is allowed to be seen from the inside as well as from the outside. Due to the prism and the open area you have a high visibility to the outside and the daylight inside.

### **Durability**

Up to 2 years in mid European conditions.

## **Printing method**


Solvent, eco-solvent, UV curable inks and latex inks.

#### Shelf life

1 year, stored at +15°C to +25°C (+59°F to +77°F) and relative humidity between 45% and 70%.

### **Warranty**

Continental Grafix products are warranted to be free of defects in material and manufacture at the time of shipment and to meet the specifications stated in the technical specification sheets. We will replace or refund the price of any Continental Grafix materials found to not meet our product specifications. In no case shall Continental Grafix be liable for any direct, indirect, or consequential damages, including labor or non-Continental Grafix materials charges. The determination of suitability of this product for any specific use is solely the responsibility of the user. No representations, guarantees or warrantees of any kind are made to the accuracy of suitability for specific applications.

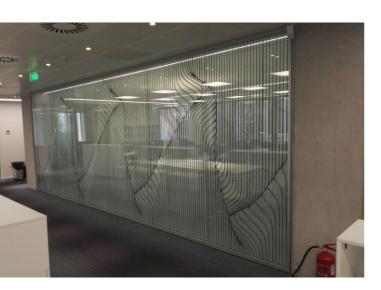



# Uses

- Shop windows
- Flat and slightly curved glass (almost every kind of windows)
- Hotels/ restaurants
- Shopping centers

## **Features & Benefit**

- Visible from both sides
- Easy application and removal
- Removal without adhesive residue
- Excellent durability
- Great dimensional stability and heat resistance

Technical information panoRama Two Way Visio		
Size	Width: 1.372 m Length: 50.00 m	
Material	Self-adhesive, calendered PVC film with integrated white prism. Printable transparent/ white front side and transparent/ white reverse side	120μ +/- 10μ
Transparent area	30% transparent area 70% white prism	
Liner	Siliconised paper liner	180μ +/- 10μ
Certificate	Humidityy resistance	Very good
	Solvent resistance	Very good
Application	Minimum application and removal temperature	+10°C / +50°F
	Minimum temperature resistance	- 10°C / +14°F

6343 Rotkreuz Switzerland